

Applications:

- High Speed Modems
- CIMs
- Hybrid Fiber Coax(HFC Networks)
- CATV

Features/Benefits:

- Patent pending contact design provides a truly cylindrical coaxial contact
- 30 dB return loss to 1 GHz

Multiple PCB mount packages:

- SMD, edge mount, right angle and straight
- Accommodate .022-.042in. center conductor sizes




Specifications:

- Impedance 75Ω
- RF Leakage -100dB min. @ 1 GHz
- Temperature Range -45°C~+85°C

NOTE: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER JIS-C3604
2. CONNECTOR INTERFACE PER MIL-STD-348A
3. PART TO BE CLEAN AND FREE BURRS
4. NICKEL PL 70 u" THICK OVER COPPER STRIKE

3	Insulator	Delrin	White
2	Contact	Brass	Nickel
1	Body	Brass	Nickel
No	Description	Material	Finish

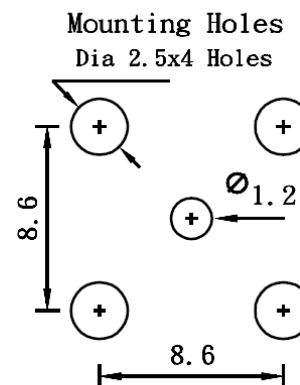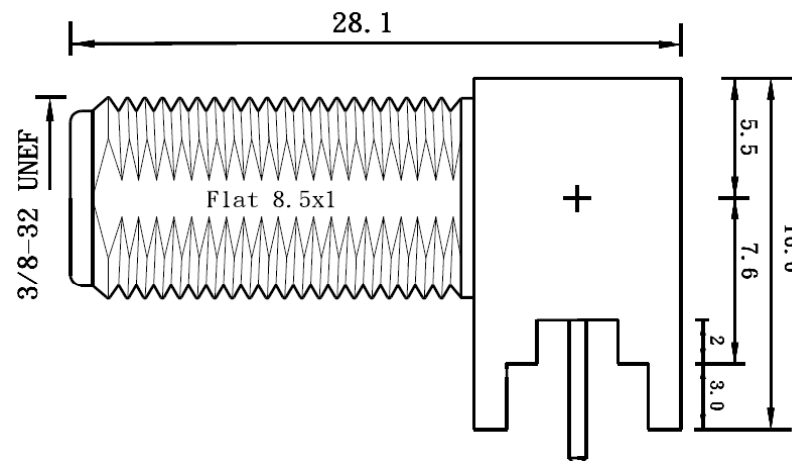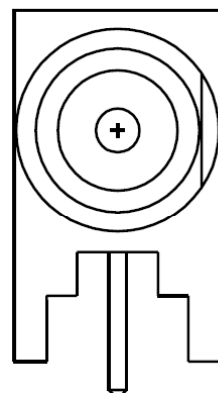

DIMENSIONS ARE IN MILLIMETERS		SPARKTRONIC CO., LTD.		RoHS COMPLIANT	
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6= ±0.2 6-30= ±0.4 30-120= ±0.6 120-315= ±1.0 315-1000= ±1.6 1000-2000= ±2.4		PART NO.	F604CU-XNND75	TITLE: F RIGHT ANGLE PCB MOUNT JACK L=28.1MM	
		DATE	November / 13 / 2014		
		NOT SCALED DRAWING			DRAWING NO.