



CONFIGURATION 產品圖

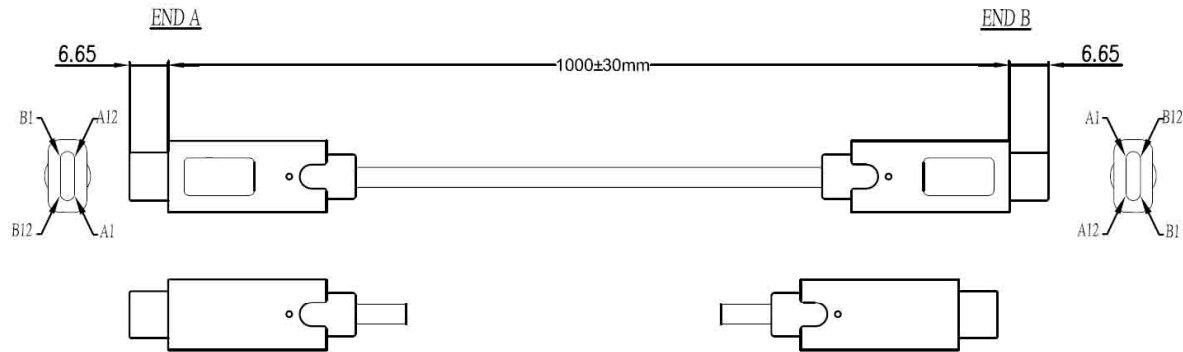

SPECIFICATION OF MATERIAL 材料規格

1. END A 左端		CONT. PLATING	Gold 3u"	MOLD No.	CMS-USB98	SHIELD'G	-
		CONNECTOR TYPE	USB-24MASS03NB	T. SCREW	-		
2. END B 右端		CONT. PLATING	Gold 3u"	MOLD No.	CMS-USB98	SHIELD'G	-
		CONNECTOR TYPE	USB-24MASS03NB	T. SCREW	Jack Screw M2 Size:5.00x37.00x7.00		
3. WIRES 線材		WIRE GAUGE	22Awg&32Awg&32Awg&32Awg	LENGTH	1015±20-0mm	SHIELD'G	AB
		CONDUCTORS	2C+4C+1T+(1TP+MAE)4	COLOR	Black	UL/CSA	UL2725
		JACKET MAT'L	PVC	INS. MAT'L	PP&HD-PE&FOAM-PE&LLD-PE	WIRE O.D.	5.0mm

4. CONNECTOR PIN OUT 接線圖

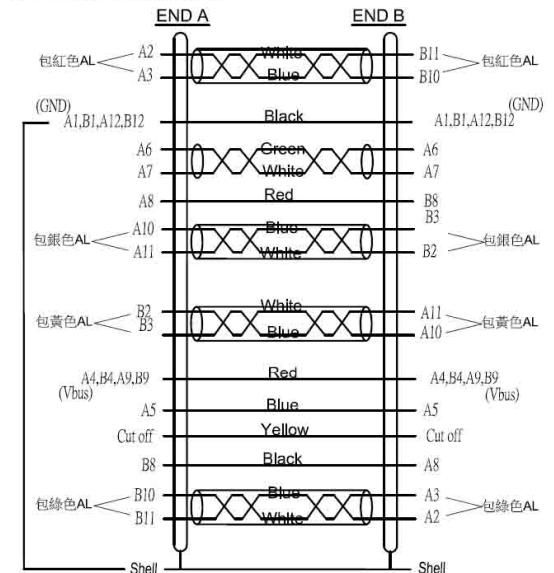

5. SPECIAL REQUIREMENTS

- 5.1 Product requirement for Green environment protection:RoHS.
- 5.2 Overmold PVC is 45P Black.

DIMENSIONS ARE IN MILLIMETERS		SPARKTRONIC CO., LTD.		RoHS COMPLIANT	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NO.	KUC31M-1MB	TITLE: USB3.1 TYPE C MALE TO MALE VERSION GEN1 CABLE L=1M (2M ALSO AVAILABLE)	
LINEAR	0.0±0.25 0.00±0.15	DATE	November / 28 / 2022		
ANGLES	± 3	NOT SCALED DRAWING		DRAWING NO.	KUC31M-1MB