


CONFIGURATION 產品圖

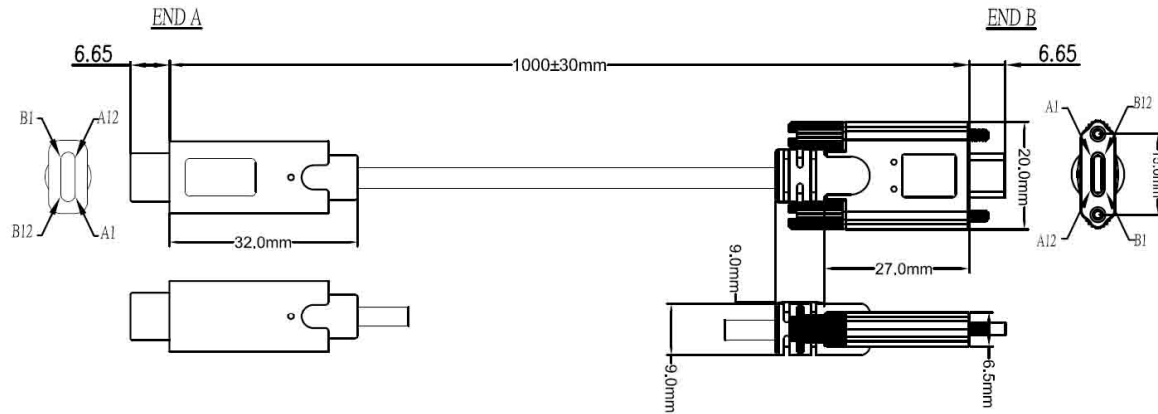


SPECIFICATION OF MATERIAL

材料規格

| | | | | | | |
|-------------|----------------|-------------------------|------------|--------------------|-----------|---------------------------------------|
| 1. END A 左端 | CONT. PLATING | Gold 3u" | MOLD No. | CMS-USB98 | SHIELD'G | - |
| | CONNECTOR TYPE | USB-12MASS03NB | | | T. SCREW | - |
| 2. END B 右端 | CONT. PLATING | Gold 3u" | MOLD No. | CMS-USB105 | SHIELD'G | - |
| | CONNECTOR TYPE | USB-12MASS03NB | | | T. SCREW | Jack Screw M2 Size:5.00x5.700x7.00 |
| 3. WIRES 線材 | WIRE GAUGE | 24Awg&32Awg&30Awg&30Awg | LENGTH | 1015+15-0mm | SHIELD'G | AB |
| | CONDUCTORS | 2C+4C+1T+(1TP+MAE)x4 | COLOR | Black | UL/CSA | UL2725 |
| | JACKET MAT'L | PVC | INS. MAT'L | PP&HD-PE&HD-PE&FEP | WIRE O.D. | 5.0mm |

4. CONNECTOR PIN OUT

接線圖

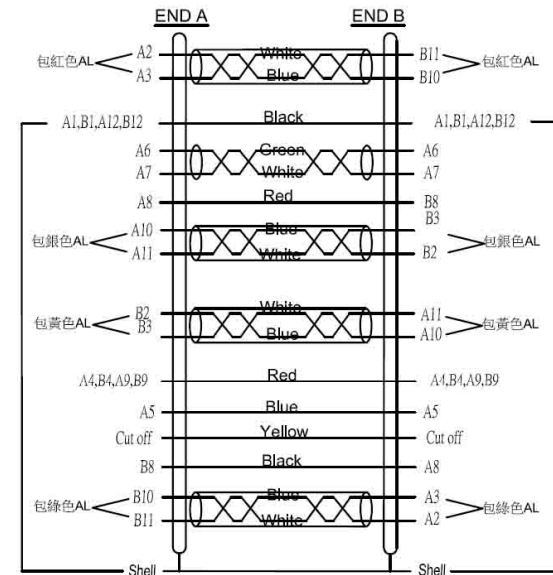

5. SPECIAL REQUIREMENTS

- 5.1 Product requirement for Green environment protection:RoHS.
- 5.2 Overmold PVC is 45P Black.

| | | | | | |
|--------------------------------------|-----------------------|------------------------------|--------------------|--|------------|
| DIMENSIONS ARE IN MILLIMETERS | | SPARKTRONIC CO., LTD. | | RoHS COMPLIANT | |
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | PART NO. | KUC31N-1MB | TITLE: USB3.1 TYPE C MALE TO MALE GEN2 CABLE L=1M (MAX. 1M) | |
| LINEAR | 0.0±0.25 0.00±0.15 | DATE | October / 4 / 2022 | | |
| ANGLES | ± 3 | NOT SCALED DRAWING | | DRAWING NO. | KUC31N-1MB |