



■ CONFIGURATION 產品圖

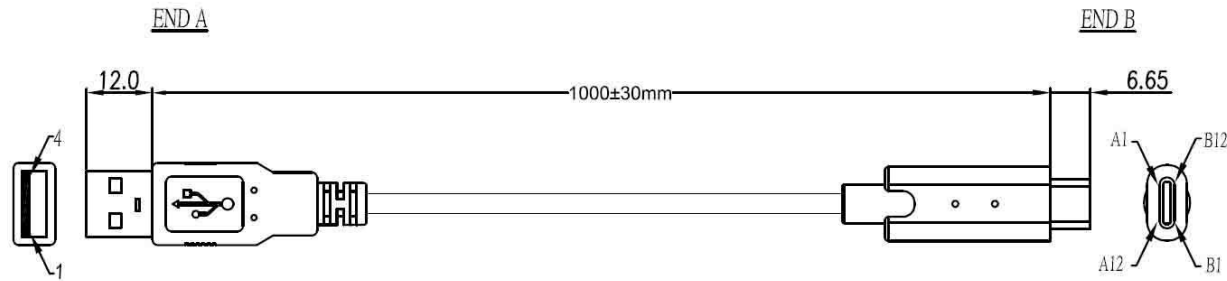

■ SPECIFICATION OF MATERIAL 材料規格

1. END A 左端		CONT. PLATING	Gold Flash	MOLD No.	CMS-USB01	SHIELD'G	-
		CONNECTOR TYPE	USB-4MASS00NW	T. SCREW	-		
2. END B 右端		CONT. PLATING	Gold 3u"	MOLD No.	CMS-USB94	SHIELD'G	-
		CONNECTOR TYPE	USB-12MASS03NB	T. SCREW	-		
3. WIRES 線材		WIRE GAUGE	24Awg+28Awg	LENGTH	990+20-0mm	SHIELD'G	AB
		CONDUCTORS	2C+1T	COLOR	Black	UL/CSA	UL2725
		JACKET MAT'L	PVC	INS. MAT'L	SR-PVC&HD-PE	WIRE O.D.	3.8mm

4. CONNECTOR PIN OUT 接線圖

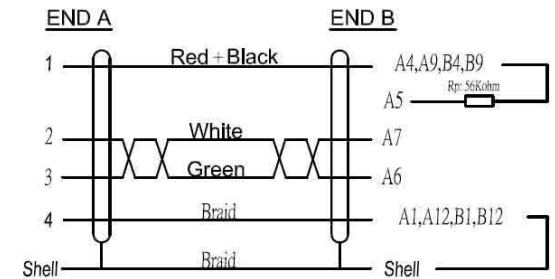

5. SPECIAL REQUIREMENTS

- 5.1 Product requirement for Green environment protection:RoHS.
- 5.2 Overmold PVC is 45P Black.

DIMENSIONS ARE IN MILLIMETERS		SPARKTRONIC CO., LTD.		RoHS COMPLIANT	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NO.	KUC31P-1MB	TITLE: USB2.0 TYPE A MALE TO USB3.1 TYPE C MALE CABLE WITH 56K OHM RESISTOR L=1M (2M ALSO AVAILABLE)	
LINEAR	0.0±0.25	DATE	October / 18 / 2022		
	0.00±0.15				
ANGLES	± 3	NOT SCALED DRAWING		DRAWING NO.	KUC31P-1MB