



■ CONFIGURATION 產品圖

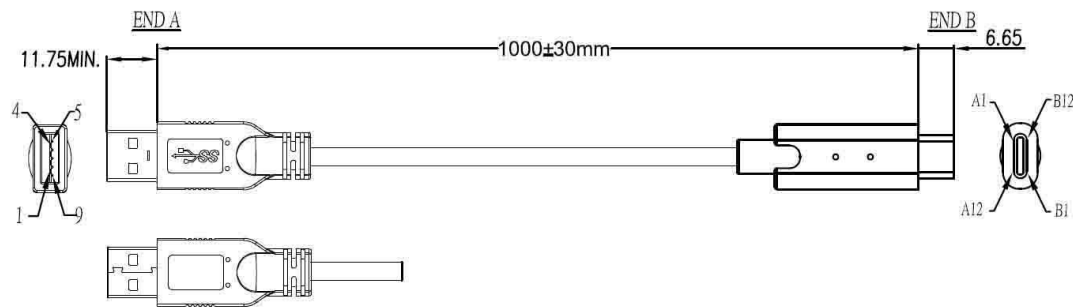

■ SPECIFICATION OF MATERIAL 材料規格

1. END A 左端		CONT. PLATING Gold Flash		MOLD No.	CMS-USB40	SHIELD'G	-
		CONNECTOR TYPE USB-9MASS30NBU				T. SCREW	-
2. END B 右端		CONT. PLATING Gold 3u"		MOLD No.	CMS-USB94	SHIELD'G	-
		CONNECTOR TYPE USB-12MASS03NB				T. SCREW	-
3. WIRES 線材		WIRE GAUGE 22Awg&30Awg&30Awg		LENGTH	990+20-0mm	SHIELD'G	AEB
		CONDUCTORS 2C+1TP+(1TP+MAE)x2		COLOR	Black	UL/CSA	UL2725
		JACKET MAT'L PVC		INS. MAT'L	SR-PVC&HD-PE&FOAM-SKIN-PE	WIRE O.D.	5.0mm

4. CONNECTOR PIN OUT 接線圖

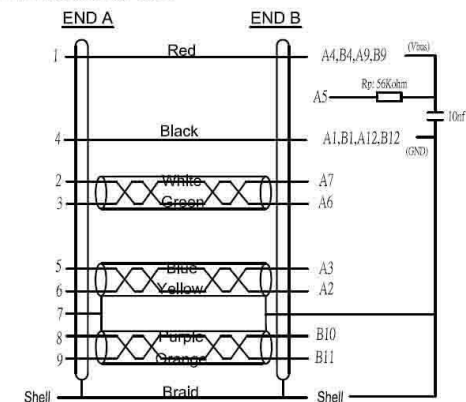

5. SPECIAL REQUIREMENTS

- 5.1 Product requirement for Green environment protection:RoHS.
- 5.2 Overmold PVC is 45P Black.

DIMENSIONS ARE IN MILLIMETERS		SPARKTRONIC CO., LTD.		RoHS COMPLIANT	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NO.	KUC31Q-1MB	TITLE: USB3.0 TYPE A MALE TO USB3.1 TYPE C MALE CABLE WITH 56K OHM RESISTOR L=1M (2M ALSO AVAILABLE)	
LINEAR	0.0±0.25	DATE	October / 18 / 2022		
	0.00±0.15				
ANGLES	± 3	NOT SCALED DRAWING		DRAWING NO.	KUC31Q-1MB