


## CONFIGURATION 產品圖

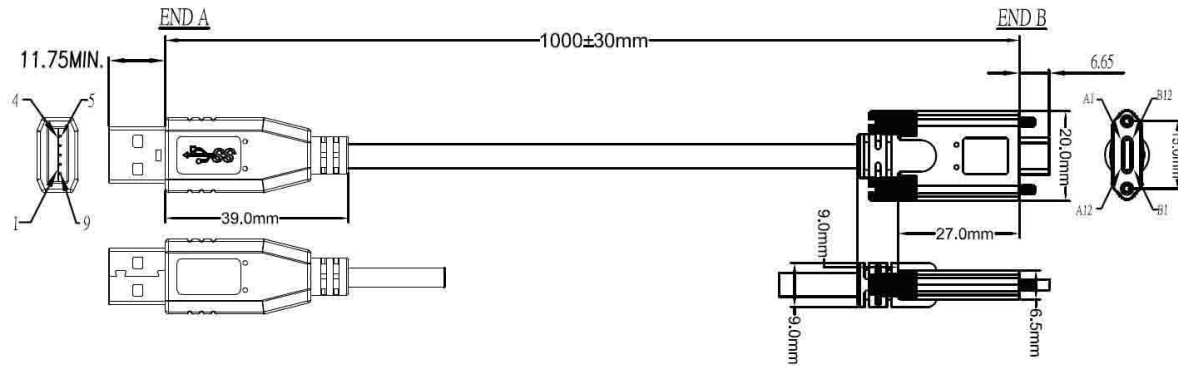

## SPECIFICATION OF MATERIAL

### 1. END A

CONT. PLATING	Gold 30u"	MOLD No.	CMS-USB52	SHIELD'G	-
CONNECTOR TYPE	USB-9MASS30NBU	T. SCREW	-		

### 2. END B


CONT. PLATING	Gold 3u"	MOLD No.	CMS-USB105	SHIELD'G	-
CONNECTOR TYPE	USB-12MASS03NB	T. SCREW	Jack Screw M2 Size:5.00±0.03x7.00		

### 3. WIRES

WIRE GAUGE	24Awg&30Awg&30Awg	LENGTH	1000±10-0mm	SHIELD'G	AB
CONDUCTORS	2C+1TP+(1TP+MAE)x2	COLOR	Black	UL/CSA	UL2725
JACKET MAT'L	PVC	INS. MAT'L	PP&HD-PE&LLD-PE	WIRE O.D.	5.0mm

## 4. CONNECTOR PIN OUT

## 接線圖

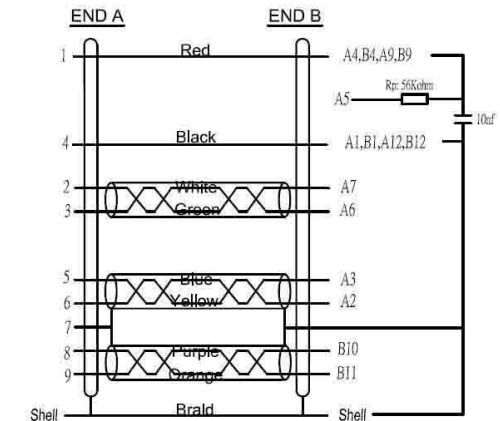

## 5. SPECIAL REQUIREMENTS

- Product requirement for Green environment protection:RoHS.
- Overmold PVC is 45P Black.

DIMENSIONS ARE IN MILLIMETERS		<b>SPARKTRONIC CO., LTD.</b>		RoHS COMPLIANT	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NO.	KUC31R-1MB	TITLE: USB3.0 TYPE A MALE TO USB3.1 TYPE C MALE GEN2 CABLE WITH 56K OHM RESISTOR L=1M (MAX. 1M)	
LINEAR	0.0±0.25	DATE	October / 18 / 2022		
	0.00±0.15				
ANGLES	± 3	NOT SCALED DRAWING		DRAWING NO.	KUC31R-1MB