


## ■ CONFIGURATION

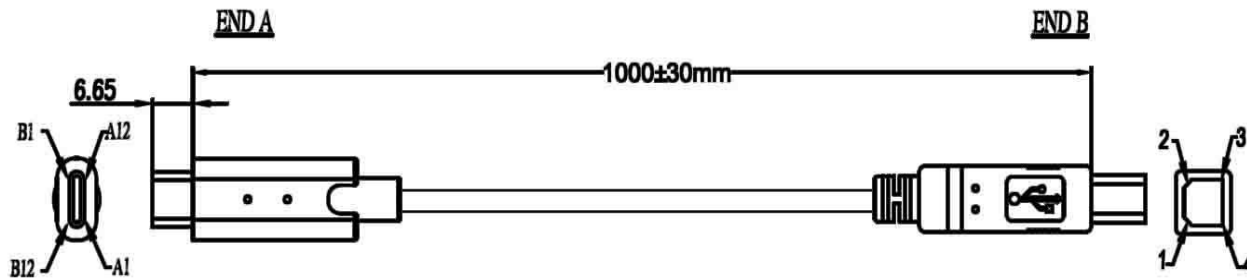

## 5. SPECIAL REQUIREMENTS

5.1 Product requirement for Green environment protection:RoHS.

5.2 Overmold PVC is 45P Black.

## ■ SPECIFICATION OF MATERIAL

### 1. END A

CONT. PLATING	Gold 3u"	MOLD No.	CMS-USB94	SHIELD'G	-
CONNECTOR TYPE	USB-12MASS03NB			T. SCREW	-


### 2. END B

CONT. PLATING	Gold Flash	MOLD No.	CMS-USB02	SHIELD'G	-
CONNECTOR TYPE	USB-4MBSS00NW			T. SCREW	-

### 3. WIRES

WIRE GAUGE	24Awg&28Awg	LENGTH	990+20-0mm	SHIELD'G	AB
CONDUCTORS	2C+1TP	COLOR	Black	UL/CSA	UL2725
JACKET MAT'L	PVC	INS. MAT'L	SR-PVC&HD-PE	WIRE O.D.	3.8mm

## 4. CONNECTOR PIN OUT

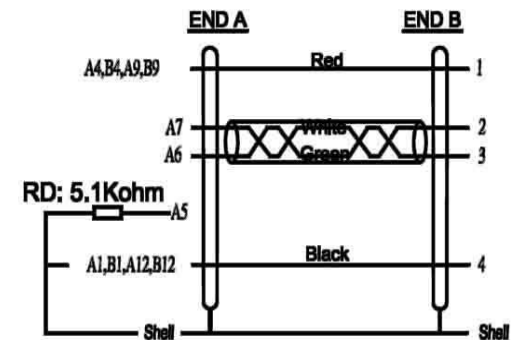

DIMENSIONS ARE IN MILLIMETERS		<b>SPARKTRONIC CO., LTD.</b>		RoHS COMPLIANT	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NO.	KUC31T-1MB	TITLE: USB3.1 TYPE C MALE TO USB2.0 TYPE B MALE CABLE WITH 5.1K OHM RESISTOR L=1M (2M ALSO AVAILABLE)	
LINEAR	0.0±0.25	DATE	October / 18 / 2022		
	0.00±0.15				
ANGLES	± 3	NOT SCALED DRAWING		DRAWING NO.	KUC31T-1MB