


## ■ CONFIGURATION

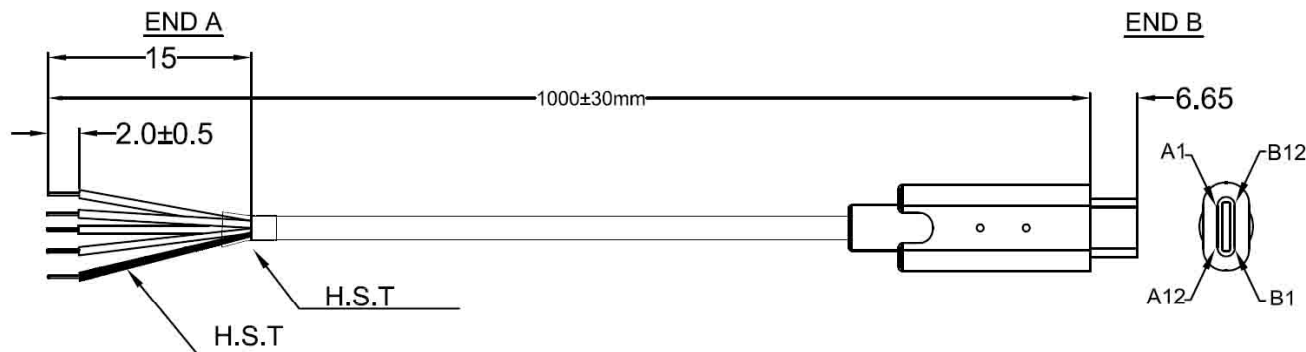

## ■ SPECIFICATION OF MATERIAL

### 1. END A

CONT. PLATING: - MOLD No.: - SHIELD'G: -

CONNECTOR TYPE: S&T T. SCREW: -

### 2. END B

CONT. PLATING: Gold 3u" MOLD No.: CMS-USB94 SHIELD'G: -

CONNECTOR TYPE: USB-24MASS03NB T. SCREW: -


### 3. WIRES

WIRE GAUGE: 24Awg+28Awg LENGTH: 990+20-0mm SHIELD'G: AB

CONDUCTORS: 2C+1T COLOR: Black UL/CSA: UL2725

JACKET MAT'L: PVC INS. MAT'L: SR-PVC&HD-PE WIRE O.D.: 3.8mm

### 4. CONNECTOR PIN OUT

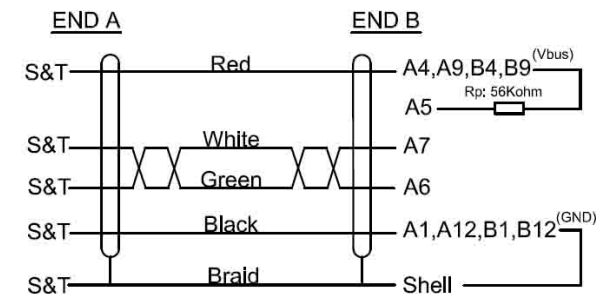

### 5. SPECIAL REQUIREMENTS

5.1 Product requirement for Green environment protection:RoHS.

5.2 Overmold PVC is 45P Black .

DIMENSIONS ARE IN MILLIMETERS		<b>SPARKTRONIC CO., LTD.</b>		RoHS COMPLIANT	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NO.	KUC31U-1MB	TITLE: USB3.1 TYPE C 24 PIN MALE WITH 56K OHM RESISTOR TO 5 PIN TINNED END L=1M (2M ALSO AVAILABLE)	
LINEAR	0.0±0.25	DATE	October / 24 / 2022		
	0.00±0.15				
ANGLES	± 3	NOT SCALED DRAWING		DRAWING NO.	KUC31U-1MB