
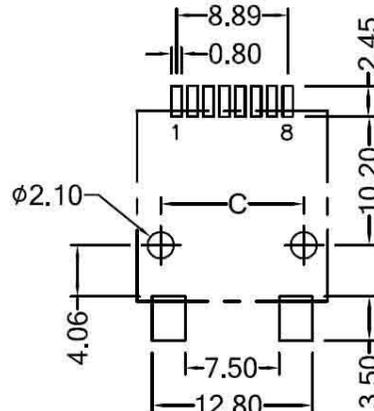



position	contact	A	B	C	D
6P	4C/6C	13.20	6.35	10.16	24
8P	8C	15.20	8.89	11.43	32

Packing: T&R

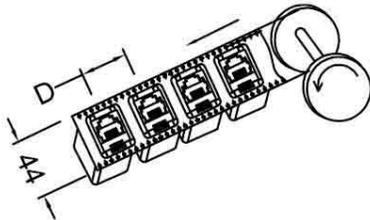

PCB LAYOUT / TOP VIEW

MATERIAL & FINISH

Housing: High temp. thermoplastic, UL94V-0, black

Conductor: Phosphor bronze, t=0.35mm

Plating: Gold plated over nickel

ORDERING INFORMATION:

P/N **M J** $\frac{\text{xxx}}{1}$ - $\frac{\text{xxx}}{2}$ $\frac{\text{B}}{3}$ - $\frac{\text{R}}{4}$

1. LOCATING PEG OPTION:

“MP” WITH POST

“MQ” WITHOUT POST

2. NO. OF POSITIONS & CONTACTS:

“88” 8P8C

“86” 8P6C

3. CONTACT FINISH:

“A” 6 MICROINCH GOLD

“B” 15 MICROINCH GOLD

“C” 30 MICROINCH GOLD

“D” 50 MICROINCH GOLD

4. PACKAGE TYPE:

“R” TAPE & REEL

Unit: m/m

Tol: ±0.20 unless otherwise stated

DIMENSIONS ARE IN MILLIMETERS		SPARKTRONIC CO., LTD.		RoHS COMPLIANT	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NO.	MJMP, MQ-xxxB-R	TITLE: FULLY SHIELDED TOP ENTRY 8P8C MODULAR PCB JACK	
LINEAR	0.0±0.25	DATE	July / 7 / 2023		
	0.00±0.15				
ANGLES	± 3	NOT SCALED DRAWING		DRAWING NO.	MJMP, MQ-xxxB-R